

SB Series
55 pound
80 pound
155 pound
225 pound
300 pound
480 pound



Hygienic Barrier Washer

Specification:

Model	US	Metric	SB-55		SB-80		SB-155		SB-225		SB-300		SB-480	
Max. Loading 1:10	Lbs.	Kg.	55	25	80	36	155	70	225	102	300	136	480	218
Overall Dimension														
Width	Inch.	mm.	56.69	1440	61.02	1550	63.58	1615	77.68	1973	91.54	2325	101.89	2588
Depth	Inch.	mm.	44.48	1130	46.85	1190	62.83	1596	62.83	1596	69.49	1765	85.04	2160
Height	Inch.	mm.	62.79	1595	64.96	1650	83.62	2124	83.62	2124	83.46	2120	105.75	2686
Wash Cylinder Information														
Basket Diameter	Inch.	mm.	29.13	740	31.1	790	42.09	1069	42.09	1069	47.24	1200	55.12	1400
Basket Depth	Inch.	mm.	24.41	620	29.5	750	31.10	790	45.28	1150	47.44	1205	55.91	1420
Basket Volume	Cu.ft	Cu.m	0.882	0.025	13	0.37	25.04	0.709	36.45	1.032	48.03	1.36	76.99	2.18
Drum Compartments			1		2		3		3		3		3	
Door Open														
Door Open Size Width	Inch.	mm.	25.74	654	14.96	380	15.75	400	15.75	400	17.72	450	17.72	450
Door Open Size Length	Inch.	mm.	19.84	504	19.49	495	23.62	600	27.76	705	29.92	760	45.67	1160
Motor														
Size	HP.	kW.	5.3	4	7.5	5.6	15	11.25	20	15	30	22	30	50
Cylinder Speed (Programmable)														
Wash	rpm.	G-force	43	0.8	42.5	0.8	36	0.8	36	0.8	34.5	0.8	32	0.8
High extract	rpm.	G-force	950	350	890	350	700	300	700	300	720	350	650	330
Drain System														
OverFlow Size	Inch.	mm.	0.75	19.05	1.5	38.1	1.5	38.1	1.5	38.1	1.5	38.1	1.5	38.1
Drain Outlet Size	Inch.	mm.	2.36	60	3	76.2	4	102	4	102	4	102	4	102
Number of drain outlet	Standard	Option	1	2	1	2	1	2	1	2	1	2	1	2
Water Inlet														
Connection size	NPT		3/4"		3/4"		1"		1-1/4"		1-1/4"		1-1/4"	
Number Of inlets	Standard	Option	2	3	2	3	2	3	2	3	2	3	2	3
Heating														
Electrical 380-415 V.	kW.		24		36		48		-		-		-	
Steam Inlet														
Connection size	NPT		3/4"		3/4"		3/4"		1"		1"		1"	
Chemical Supply System														
Number of chemical comp.	Standard		3		3		5		5		5		5	
Liquid supply connection size	NPT		1/2"		1/2"		1/2"		1/2"		1/2"		1/2"	
Air Compressed														
Connection size	NPT		1/8"		1/8"		1/8"		1/2"		1/2"		1/2"	
Pressure Max.	psi	kg./cm2	125	8.6	125	8.6	125	8.6	125	8.6	125	8.6	125	8.6


Standard Features:

- All wetted parts are 304 (18/8) stainless steel.
- Compartment supply dispenser.
- Advanced microprocessor.
- 300G extract force.
- Built in vacuum breaker.
- Variable frequency drive.
- Stainless steel cabinet.
- Single motor drive.

Optional Feature:

- Direct steam heating
- Electrical heating
- EMI filter for CE

Specification and Design to change without notice.
Additional option: Consult factory or distributor.

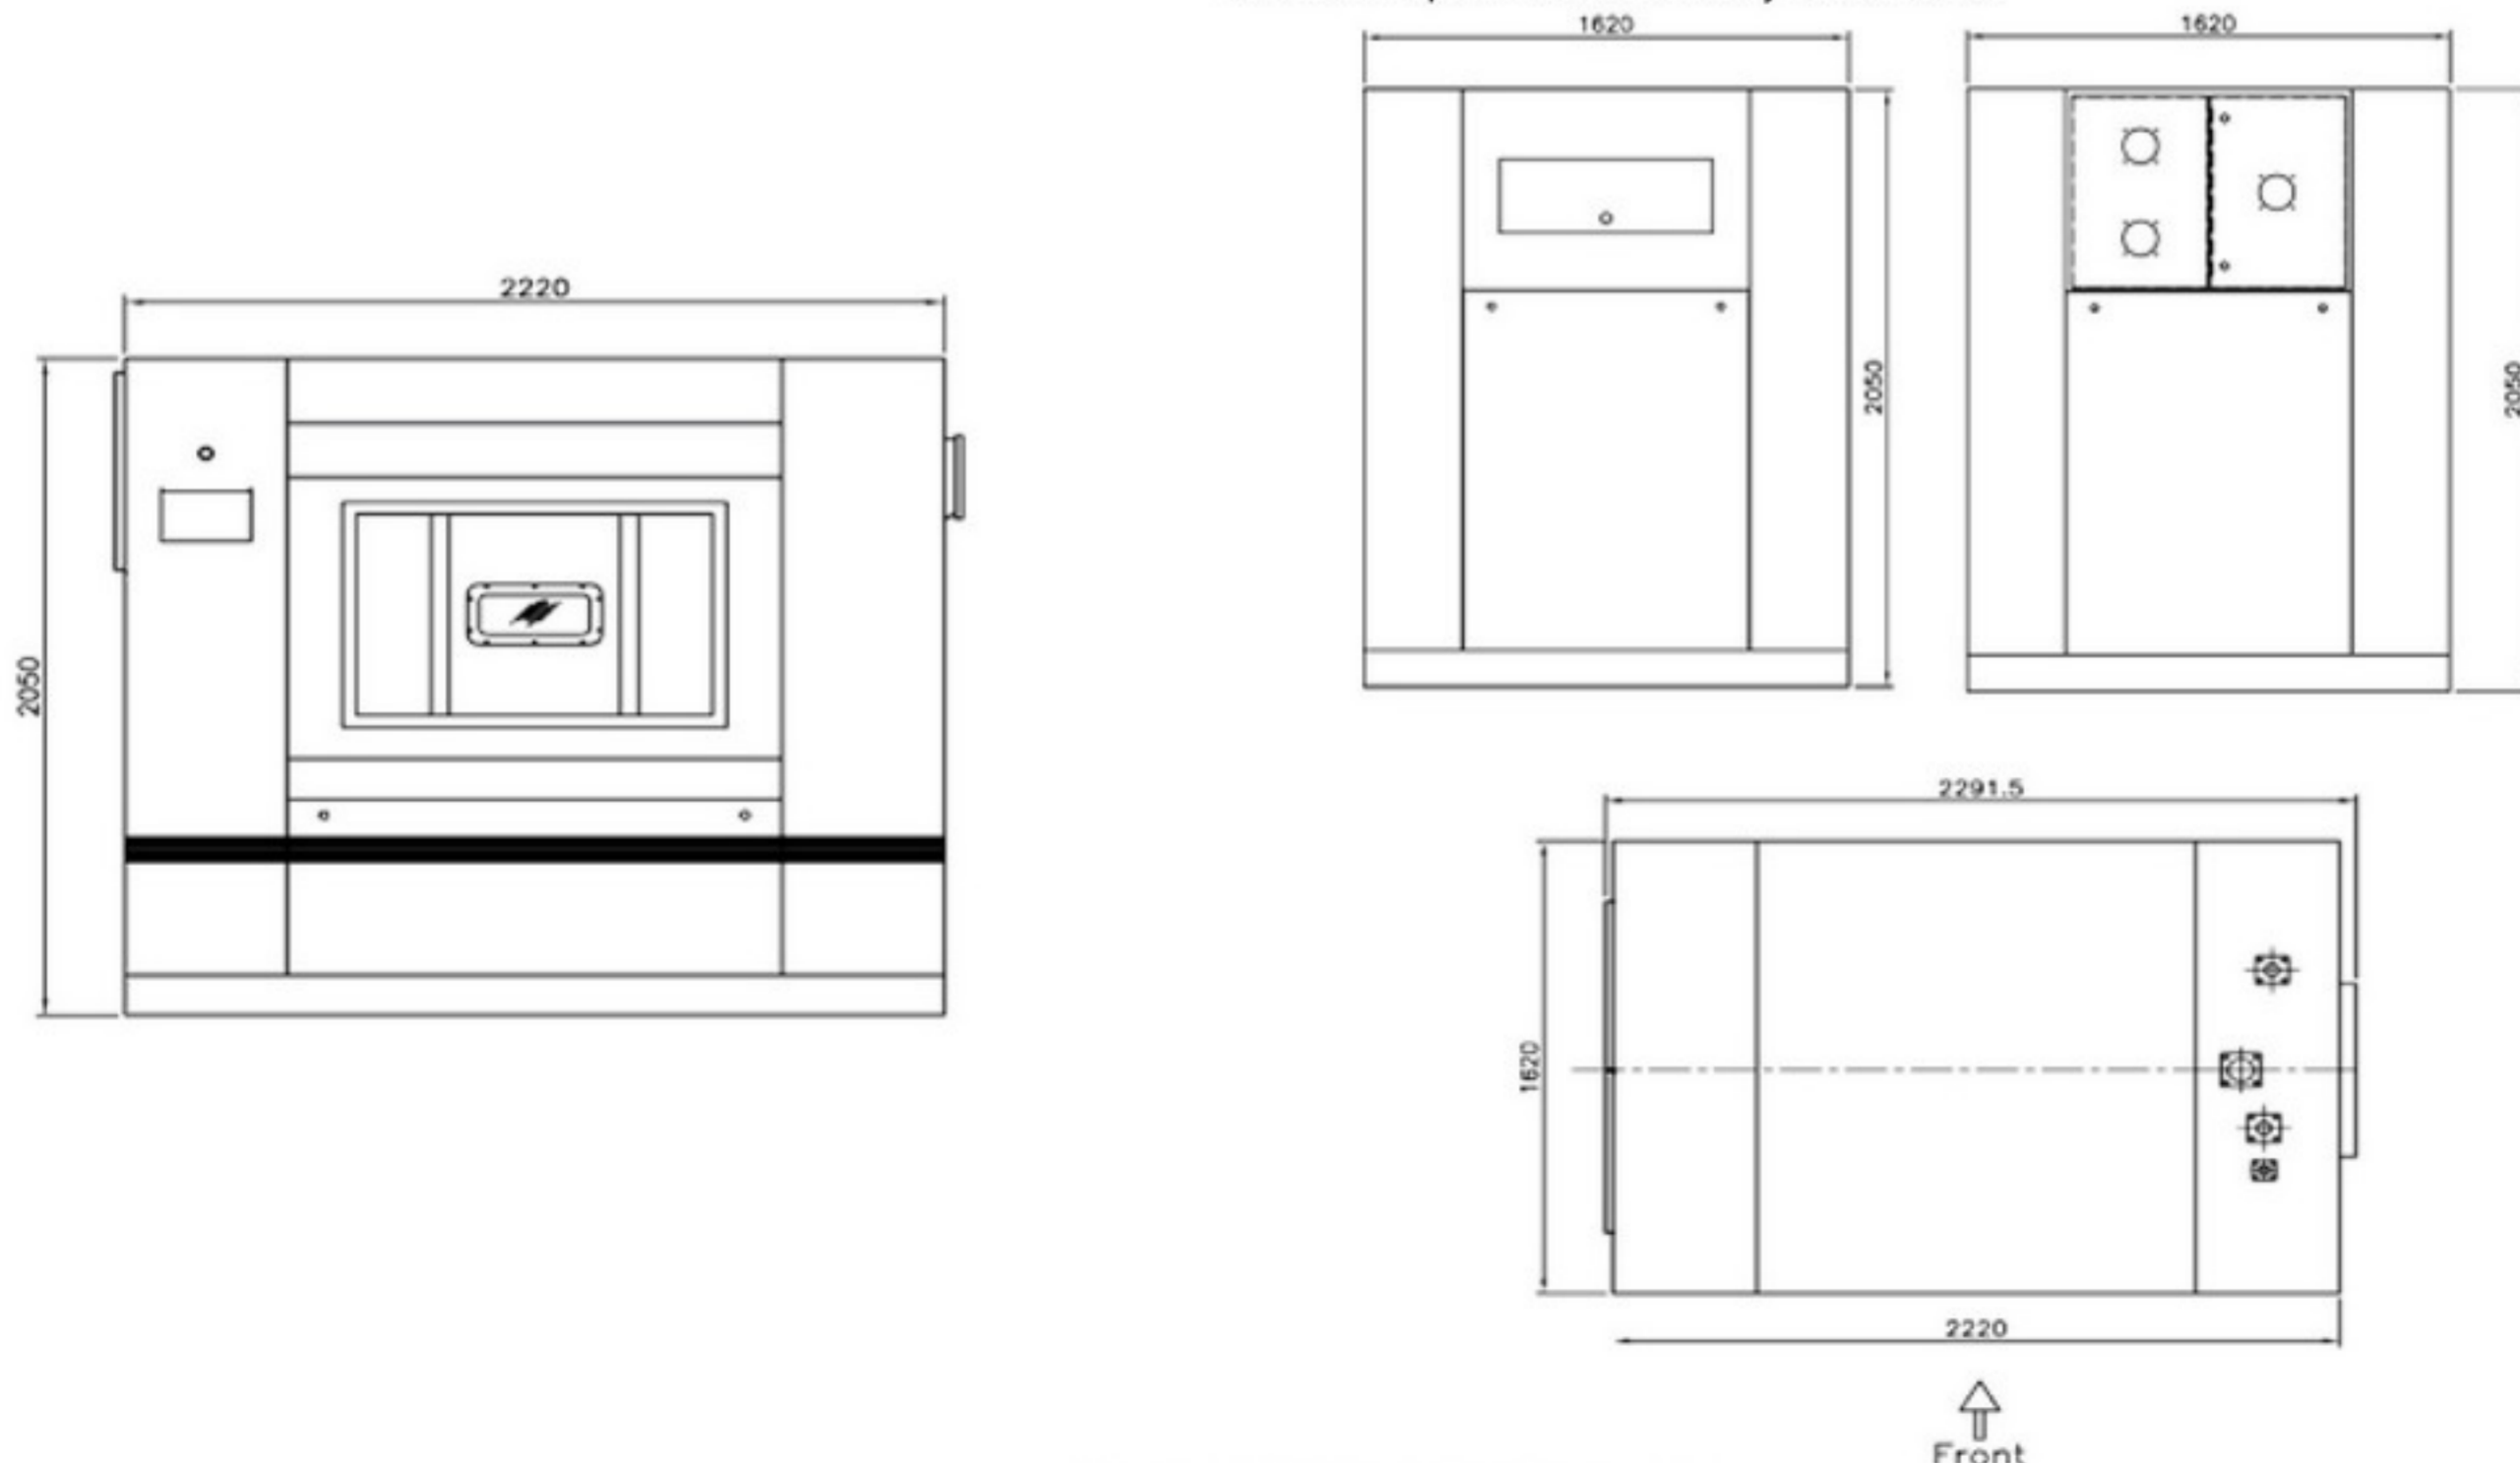

ACCURATE TECHNOLOGIES CO.,LTD

Bangkok,Thailand Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2740-5522,2740-5533

www accuratethai.com Email : sales@accuratethai.com