




SHANGHAI CHINA



**FLYING FISH 腾鱼机械设备**  
**MACHINERY MANUFACTURY**



上海腾鱼机械设备有限公司  
Shanghai Flying Fish Machinery Manufacturing Co., Ltd.  
Add: No. 8555 Quannanfeng Rd., Fengxian District, Shanghai, CN.  
Tel: 0086-21-3758 0034 Fax: 0086-21-37587295  
www.chinelaundrymachine.com






# FLYING FISH BE YOUR BEST PARTNER



## CONTENT

- > Automatic Washing Machine
- > Industrial Washing Machine
- > Clothes Dryer
- > Flatwork Ironing Machine
- > Special Washing Machine
- > Folding Machine
- > Hydro Extractor
- > Dry Cleaning Machine
- > Pressing Machine
- > Garment conveyor
- > Other Laundry Products

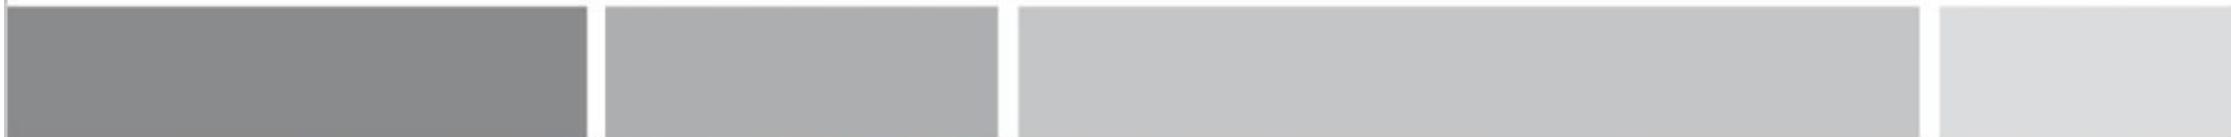

# T Team & Certification



# P Products Field






# XGQ Series Automatic Washing Machine, Washer Extractor



- > Fully automatic, microcomputer-controller, 5 standard programs, with 30 additional adjustable programs, flexible for set.
- > High quality stainless steel, good appearance, long life.
- > Full suspension shock structure, low shake, low noise, combination of shock absorbers and springs for maximum absorption, need no excessive foundations.
- > Operator can flexibly choose. Electric, Steam or Hot water as heat source.
- > Imported bearing, precise and durable.
- > Fixed screws support for long-distance transportation, avoid shaking damage during transit.
- > High quality inverter system, easily realize washing and extracting frequency stepless adjusting.
- > Multiple sealing system, oil sealing, water sealing, stainless steel sealing.
- > External lubrication oil cup, easy to maintenance.
- > Safety door interlock system, reduce fatigue, missuse and the risk.

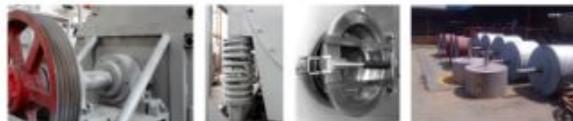


Model		XGQ-10F	XGQ-15F	XGQ-20F	XGQ-25F	XGQ-30F	XGQ-50F	XGQ-70F	XGQ-80F	XGQ-100F	XGQ-120F
Capacity	KG	10	15	20	25	30	50	70	80	100	120
Drum Dimension	mm	Φ630x320	Φ670x475	Φ720x545	Φ800x545	Φ905x500	Φ1065x628	Φ1200x600	Φ1200x700	Φ1200x820	Φ1300x830
Drum Volume	L	100	167	221	274	321	559	678	791	930	1101
Drum Speed (wash/hi-extract)	r/min.	50/800	50/850	46/800	46/750	40/750	38/720	38/700	38/650	38/650	38/580
Voltage	V	220/240/380/415/440									
Motor Power	kW	1.5	1.5	2.2	3	4	5.5	7.5	7.5	7.5	11
Inverter Power	kW	1.5	1.5	2.2	3.7	5.5	7.5	11	11	11	15
Inlet of Hot Water	Inch					1	1 1/4	1 1/2	2	2	2
Inlet of Cold Water	Inch					1	1 1/4	1 1/2	2	2	2
Air Pressure	mpa.					0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6
Dimension	L(mm)	780	1100	1150	1240	1340	1640	1750	1750	1800	1980
	W(mm)	1100	1000	1060	1220	1360	1570	1540	1640	1925	2008
	H(mm)	1300	1500	1550	1600	1722	1912	2132	2132	2132	2100
Weight	KG	320	520	580	700	1450	2200	2800	2900	3100	3700

# XGP Series Industrial Washing Machine

# XGP Series Industrial Washing Machine



Model		XGP-15L	XGP-25L	XGP-35L	XGP-50L	XGP-70L	XGP-100L
Capacity	KG	15	25	35	50	70	100
Drum Diameter	mm	750	980	980	980	980	1200
Drum Depth	mm	380	395	495	666	950	850
Drum Volume	L	168	298	373	502	716	961
Inlet Water Pipe	Inch	1	1.5	1.5	1.5	2	2
Out Water Pipe	Inch	2	2	2	2	2	3
Motor Power	kW	1.1	1.1	1.5	1.5	2.2	3
Voltage	v	220/240/380/415/440					
Dimension	L(mm)	900	1200	1200	1200	1200	400
	W(mm)	900	1100	1150	1450	1650	1600
	H(mm)	1420	1630	1630	1630	1630	1850
Weight	KG	300	420	480	530	600	1000



> It is driven by triangle belt which is durable and moves smooth with low shock.

> The drum and panel are in stainless steel, smooth surface, good appearance, long life, there are safety lock on both inner drum and outer drum.

> Suitable for laundry, hostel, troop, hospital, hotel, blanching & dyeing factory, large & middle size enterprise.

# BE CLEAN & HEALTHY



Model		XGP-35W	XGP-50W	XGP-70W	XGP-100W
Capacity	KG	35	50	70	100
Drum Diameter	mm	700	840	970	970
Drum Depth	mm	930	1000	1000	1370
Inlet Water Pipe	Inch	2	2	2	2
Out Water Pipe	Inch	2	2	2	2
Motor Power	kW	1.5	2.2	3	4
Inverter Power	kW	1.1	1.5	1.5	3
Voltage	v	220/240/380/415/440			
Dimension	L(mm)	1820	1890	1855	2260
	W(mm)	900	1050	1185	1180
	H(mm)	1200	1250	1470	1470
Weight	KG	350	450	700	900

Model		XGP-30H	XGP-50H	XGP-70H	XGP-100H	XGP-150H	XGP-200H	XGP-250H	XGP-300H
Capacity	KG	30	50	70	100	150	200	250	300
Drum Diameter	mm	660	850	920	990	1100	1210	1210	1320
Drum Depth	mm	1000	1000	1220	1420	1800	2000	2200	2200
Drum Volume	L	342	567	811	1093	1710	2299	2528	3009
Inlet Water Pipe	Inch	0.75	1	1	1	1.5	1.5	1.5	1.5
Motor Power	kW	1.5	2.2	3	4	4	5.5	7.5	11
Steam Pressure	mpa.	0.3-0.6							
Voltage	v	1860	1880	2120	2260	2820	3050	3250	3250
Dimension	L(mm)	220/240/380/415/440							
	W(mm)	1160	1300	1360	1500	1700	1900	1900	1900
	H(mm)	1290	1510	1590	1720	1900	1900	1600	2050
Weight	KG	387	510	595	912	1900	2200	2500	2700



Fully automatic computer control the temperature, temperature control devices, over-temperature protection device.



Heating: electrical, gas, steam, electrical and steam, cool. Operator could choose. Optimal design of cooling fan, with the best heat dissipation, wind speed.

Drums are all in stainless steel, panels are in stainless steel or spray material, prevent the pollution of corrosion to fabric.

Large door, easy loading and unloading, opens 180°, option: left or right opening.



Easy accessibility to the vital parts, easy service, quick replacement of the belt.



> Commercial double stack washer and dryer for laundry shop, top drum for dry, bottom drum for wash and extract, saves space.

> High quality stainless steel drum, anti-corrosion, good appearance, long life.

> With mechanical suspension shock structure, low noise, free standing.

> Adopted imported seal, sealing is good, no leakage, colorful panel, nice appearance.

> The drum adopts high quality stainless steel welded together. The panel adopts high quality stainless steel drawplates.

> Specification: Semi stainless and full stainless steel



Model		HG-10	HG-15	HG-20	HG-25	HG-30	HG-35	HG-50	HG-70	HG-100	HG-120
Capacity	KG	10	15	20	25	30	35	50	70	100	120
Drum Diameter	mm	670	750	890	970	980	970	1070	1200	1500	1600
Drum Depth	mm	350	645	700	670	840	1000	1000	1000	1100	1100
Drum Volume	L	123	285	435	495	633	739	900	1130	1943	2211
Voltage	V	220/240/380/415/440									
Motor Power	kW	0.55	0.55	0.75	0.75	0.75	0.75	1.1	1.5	2.2	2.2
Fan Power	kW	0.55	0.55	0.75	0.75	0.75	0.75	1.1	1.5	1.5*2	1.5*2
Heating Power	kW	230									
Dimension	L(mm)	1000	840	1040	1060	1130	1060	1320	1380	1600	2020
	W(mm)	870	1180	1210	1250	1370	1560	1550	1590	1880	1700
	H(mm)	1780	1700	1780	2000	1920	2000	1988	2200	2430	2630
Net Weight	KG	250	400	430	450	460	480	550	700	1000	1000

Model		SWD-10	SWD-12	SWD-15
Washer Capacity	KG	10	12	15
Dryer Capacity	KG	10	12	15
Washer Drum Dimension	mm	Φ630*320	Φ580*450	Φ670*475
Washer Drum Volume	L	100	119	167
Washer Motor Power	kW	1.5	1.5	1.5
Washer Drum Dimension	mm	Φ670*350	Φ700*400	Φ750*645
Dryer Drum Volume	L	100	119	167
Dryer Motor Power	kW	0.35	0.35	0.35
Heating Power	kW	4.4	6.6	8.8
Dimension	L(mm)	980	980	980
	W(mm)	920	1020	1040
	H(mm)	2000	2100	2100
Net Weight	KG	350	400	450



With the isolating type and isolating wall, divides the room into two separate areas, meets the requirement of gem-free, dust-free, anti-static washing needs.

The panel, cylinder, drum are all high quality stainless steel, long life.

Model		GL30	GL50	GL100
Capacity	L	30	50	100
Motor Power	kW	4	5.5	7.5
Drum Dimension	mm	φ800*1030	φ880*1050	φ950*1450
Cold Water Inlet	inch	1	1	1
Voltage	V	220/240/380/415/440		
Dimension	L(mm)	1320	1720	1850
	W(mm)	1100	1100	1330
	H(mm)	1820	1820	2200
Weight	KG	1570	1750	2500



The whole unit is combined inner drums, outer drums, rotatable lifting bearing system, shock absorbing spring, shock reducer and lifting cylinder and so on.

For high extraction, there are four speeds depending on different materials. The speed regulating system is controlled by LS inverter, washing speed and extracting can raise promptly, protect the garments and other cloth.

High quality stainless steel is for anti-rust and long-term service.

Model		SXT-120F	SXT-150F
Rated Capacity	KG	120	150
Drum Dimension	mm	φ1300*830	φ1470*880
Door Size	mm	φ720 or φ800	φ720 or φ800
Motor Power	kW	11, 1440r/min	18.5, 1440r/min
Washing Speed	r/min	38	38
Extracting Speed	r/min	48-580	48-580
Inverter Power	kW	15	20
Inlet Of Water	inch	2	3
Inlet Of Chemical	inch	3/4	1
Inlet Of Steam	inch	1	1 1/2
Steam Pressure	Mpa	0.4-0.6	0.4-0.6
Water Pressure	Mpa	0.2-0.3	0.2-0.3
Drain Pipe	mm	150	150
Water Consumption	L/kg	<=25	<=25
Dimension	mm	2000*2200*2200	2500*2280*2280
Weight	KG	4300	5000



# YP Series (1,2,3,4) Rollers Ironing Machine



Sealed rotary joints, prevent leakage, safety and reliability, save energy.



Variable frequency, variable speed according to fabric, temperature, moisture steam supply, etc.



Three-phase electrical system, overload protection, voltage and short circuit protection, emergency stop switch.



Frame and auxiliary, high-quality steel carbon structures, strong and durable. Pressure roll with guiding ribbons, superior ironing quality, nomex ironing belts.



Stainless steel roller, large diameter (Φ800mm or Φ600mm), surface is smooth. Simple control by Start/Stop button. The fence and travel switch in the input part, reduce fatigue, misuse and the risk.



For bedsheets, quilts, tablecloth, towel, curtain, bath towel etc..

Model		YP-6015	YP-6016	YP-8025	YP-8028	YP-8030	YP-8032	YP2-8025	YP2-8028	YP2-8030	YP3-8030
Max Ironing width	mm	1500	1600	2500	2800	3000	3200	2500	2800	3000	3000
Roller Diameter	mm	600	600	800	800	800	800	800	800	800	800
Qty. of Roller	pcs	1	1	1	1	1	1	2	2	2	3
Ironing Speed	m/min.	0-5	0-5	0-6	0-6	0-6	0-6	3-25	3-25	3-25	5-30
Voltage	V	220/240/380/415/440									
Motor Power	kW	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.2
Inverter Power	kW	1.5	1.5	1.5	1.5	2.2	2.2	2.2	2.2	2.2	2.2
Max Ironing Temp.	℃	230									
Dimension	L(mm)	2600	2600	3740	4040	4240	4400	3740	4040	4240	4240
	W(mm)	1400	1400	1360	1360	1360	1360	2340	2340	2340	3060
	H(mm)	1000	1000	1240	1240	1240	1240	1590	1590	1590	1350
Weight	KG	950	950	1300	1400	1500	1700	2200	2400	2600	3800



> Double times horizontal and three longitudinal, the biggest fold function scope is 3300mm.

> PLC programmable controller with superior, anti-jamming capability.

> Perfect the diagnosis function and safety protection system for daily use.

Model		ZD3000-V	ZD3300-V
Max Folding L*W	mm	3000*3000	3300*3000
Max Speed	m/min	10~50	10~50
Layers	layer	5	5
Rated Power	kW	1.3	1.3
Voltage	V	220/240/380/415/440	
Dimension	L(mm)	4120	4320
	W(mm)	2800	2800
	H(mm)	1760	1760
Weight	KG	1600	1800



> Cover and inverter is optional.

> The panel and drum are all in stainless steel, good appearance and long life.

> It was assembled with unique shock-absorber, three legs suspended structure, reasonable structure, running stable, low noise.

> The brake system adopts feet braking, smooth braking, easy and flexible to operate.

Model		TL-15	TL-25	TL-35	TL-50	TL-70	TL-100
Capacity	KG	15	25	35	50	70	100
Drum Dimension	mm	Φ440*370	Φ570*310	Φ640*350	Φ850*370	Φ950*400	Φ1000*400
High Spin Speed	r/min	900	850	830	786	780	770
Motor Power	kW	1.5	1.1	1.5	4	5.5	7.5
Voltage	V	220/240/380/415/440					
Dimension	L(mm)	800	860	950	1100	1350	1500
	W(mm)	800	1000	1100	1150	1450	1600
	H(mm)	780	660	700	850	900	900
Weight	KG	125	350	400	900	1000	1200



- > Capacity from 6kg to 20kg, fully auto, fully enclosed.
- > High quality recycle cooling system, efficient recovery of solvents.
- > The centrifugal filter remove impurities, particles, pigment, ensure clean solvent, avoid dyeing, blockage.
- > Safety door interlock system, protect operator.



- > It can wash, spin and dry, full function, operate easily.
- > Three bottom tanks, distillation tank, distillation condenser, water separator, nylon filters, etc., protect the machine and save solvent.
- > Capacity from 6kg to 16kg, semi auto, semi enclosed.



Model		GXQ-6	GXQ-8	GXQ-10	GXQ-12	GXQ-16	GXQ-20
Capacity	KG	6	8	10	12	16	20
Drum Volume	L	108	137	174	182	312	313
Washing Speed	r/min	34	34	34	34	34	32
Middle Spin Speed	r/min	370	370	370	370	370	450
Hydraulic Sump Power	kW	0.75	0.75	0.75	0.75	1.5	0.75
Washing Power	kW	0.3	0.4	0.4	0.4	0.75	1.5
High Spin Power	kW	1.3	1.5	1.5	1.5	2.2	4
Filter Power	kW	0.55	0.55	0.55	0.55	0.55	1.75
Dimension	L(mm)	1220	1480	1540	1520	2070	2160
	W(mm)	1230	1280	1450	1360	1440	1530
	H(mm)	1700	2050	2040	2110	2250	2040
Weight	KG	650	700	800	950	1200	2240

Model		GX-6	GX-8	GX-10	GX-12
Capacity	KG	6	8	10	12
Drum Dimension	mm	Φ635*300	Φ730*360	Φ730*440	Φ730*520
Washing Speed	r/min	35	35	35	40
Middle Spin Speed	r/min	428	428	428	450
Hydraulic Pump Power	kW	0.55	0.55	0.55	0.75
Motor Power	kW	1.5	1.5	1.5	2.2
Fan Power	kW	0.55	0.55	0.55	0.75
Filter Power	kW	0.55	0.55	0.55	0.55
Dimension	L(mm)	1400	1560	1740	1750
	W(mm)	910	1250	1330	1350
	H(mm)	1730	1930	2030	1850
Weight	KG	700	1000	1200	1350



> Be designed for hydrocarbon dry cleaner.

> Steam or electric heated.

> Capacity from 8kg to 15kg, operate easily.

> Using hydrocarbon solvent, green washing, protect fabric, no damage to the fiber and skin, non-toxic, smells sweetness.

> Can wash and extract, could match with hydrocarbon dryer.

> Capacity from 8kg to 15kg, operate easily.

Model		SGX-8	SGX-10	SGX-15	HG-8	HG-10	HG-15
Capacity	KG	8	10	15	8	10	15
Drum Dimension	L	Φ630*310	Φ700*300	Φ720*380	Φ630*310	Φ630*380	Φ720*380
Drum Volume	L	—	—	—	120	158	226
Washing Speed	r/min	50	48	46	—	—	—
Middle Spin Speed	r/min	100	88	85	—	—	—
High Spin Speed	r/min	1100	850	850	—	—	—
Drying Speed	r/min	—	—	—	42	38	35
Blower Power	kW	1.1	1.5	2.2	0.4	0.75	1.5
Hydraulic Pump Power	kW	0.55	0.55	0.75	—	—	—
Motor Power	kW	—	—	—	0.37	0.37	0.55
Dimension	L(mm)	1580	1580	1580	1000	1000	1000
	W(mm)	850	950	950	850	950	850
	H(mm)	1700	1700	1700	1700	1700	1700
Weight	KG	600	650	750	280	300	300



Model		HQB40-A	HQB40-B	HQB60-A	HQB60-B
Washing Capacity	KG	NO	NO	YES	YES
Iner Buket Material		Stainless Steel			
Using Method		siamese coin box	IC Card-Operated	siamese coin box	IC Card-Operated
Heated Power	kW	1.4/0.9			
Dimension	L(mm)	600			
	W(mm)	435			
	H(mm)	700			
Net Weight	KG	22			
Total Weight	KG	25			

## ZDMJ-D Towel Folding Machine

- > Max size before folding: 1200x1920mm
- > Max size after folding: 600x650mm
- > Auto control with big LED screen and multi-language interface.
- > The sizes of towels can be detected and the folding width can be adjusted by the sensor. Lateral folding is done with relative folding blade.
- > The length of towels can be measured with the coder on the revolving shaft and the folding mode can be automatically decided. The first cross fold is done via running in both directions and blowing system.
- > The structure innovatively designed is adaptable to different thickness of towels and ensure good result of folding and enter the second fold smoothly.
- > The second cross fold is done also via motor running in both directions and blowing system with adding the adjustable tilting degree of the conveying terrace so that the folding result is ensured.
- > Output positioned accurately. Auto counter for stacking. Fast respond. Short work cycle.





## WJT Series Universal Laundry Press Machine

- > Available to press any special parts of cloth.
- > With strong vacuum moisture removing system.
- > Can press cloth dehydrated. Using high-quality pneumatic components and with reasonable designed steam circuit. Controlled by compressed air.
- > Steam circuit is very simple and efficient. Temperature rises fast and with low heat ullage.




## SBP Series Automatic Shoulder-Back Garment Presser

- > High-quality components and with reasonable designed steam circuit.
- > With 6mm polished stainless steel plate and reasonable steam pressure, it can make sure of high-quality press and perfect goodness of it.
- > Temperature rises fast with low heat ullage.
- > It is stable, reliable, safe, simple and efficient.



## CCPM Series Shirt Collar and Cuff Pressing Machine

- > With simple and reliable design, the pressure of the machine can be adjusted sleeplessly, and which is equipped with a programmable computer system to set the pressing time, suction time, etc. to meet the requirement of different kinds of fabrics.
- > The buck shape is with the smooth and durable surface, the shape is specially designed for collar and cuff pressing of shirt.

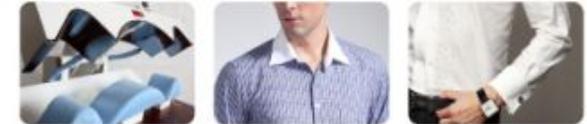

## SBP Series Shirt Body Pressing Machine

- > The front chest position of garment in the corners of the buck is to improve the finish in the underarms and shoulder areas.
- > The highly polished stainless steel head transfers head evenly to provide a professional finish every time.
- > The size of head is suitable for most of garments.
- > The machine frame is designed elegant and lightened.





## YC--A Shirt. Collar& sleeves integrated pressing machine



Exclusive modularization composite mode: Collar & sleeves part and body part are movable and can combine freely to used space.It can increase efficiency and used space . For example collar and sleeves part and body part can be combined together.It will save space.The foundation of body part can be working table.

Controlled by touch screen PLC,it is easy to operate. Patent pending,exclusive modularization composite mode: Collar & sleeves part and body part are movable and can combine freely according to used space.It can increase efficiency and used space. For example,collar and sleeves part and body part can be combined together.It will save space.the foundation of body can be working table. All heating moulds are made of mirror polished stainless steel,it will never rusty. All pneumatic components are purchased from world leading manufacturers, For example,all PU air tubes are from Legris Parker.

## DGN-6 Series Multi-function ironing table



- > It can used as a spotting table with jet gun.
- > It has strong absorption, dehumidity fast.
- > It has good performance when it was used for wool ,silk, fluff, because it can blow out wind for ironing. It is good at ironing skirt.
- > It has a pedal swith, round head and light, conveniently for operation.
- > Taking water, a moisture, cooling stereotypes of the function.





## Ironing Table

> Strong absorbability, dehumidity, the effect of finalize design is good.

> It is suitable for most kinds of fabrics and semi finished products.

> It has a pedal swith and round head, conveniently for operation.



## Commercial Appliance Machine



Model		XQB48-6036A	XQB48-6036B	XQB48-6036C	XQB48-6036D	XQB48-6036E	XQB48-6036F	XQB48-6036G	XQB48-6036H
Washing Capacity	KG					4.8			
Iner Buket Material					Plastic				
Out Case Material		coated Steel	stainless steel	coated Steel	stainless steel	coated Steel	stainless steel	coated Steel	stainless steel
Ozone disinfection		NO	NO	YES	YES	NO	YES	NO	
Using Method		siamese coin box	siamese coin box	siamese coin box	siamese coin box	IC Card-operated	IC Card-operated	coin & IC Card	coin & IC Card
Program 1	min.					23			
Program 2	min.					30			
Output Power (Washing)	W					340			
Output Power (spin)	W					230			
Dimension	L(mm)					530			
	W(mm)					520			
	H(mm)					860			
Net Weight	KG					28			
Total Weight	KG					33			

## PP Automatic Pants Pressing Machine



> According to the need to set parameters, to satisfy different programme requirements.

> It has more pressure than normal ironing pressure because of powerful double cylinder.

> Inside the machine has electric heater.

> Can be used for Pants Topper and trouser legs.

Model		PP-L	PP-T
Voltage	V	220	220
Heating Power	kW	5	2
Compressed air pressure	L/min.	0.3-0.55	0.3-0.55
Air consumption	L/h.	25	22
Dimension	L(mm)	1200	900
	W(mm)	1300	1300
	H(mm)	1450	1450
Weight	KG	420	280

## ZPT Automatic Dummy Machine



Suitable for laundry, hotels and dyeing shops for fine pressing superb garments such as suits, wool uniforms etc.





### BZ Series Clothes Packing Machine

This machine is stable, economic and durable. The garment packed by it keep dust and oil distain away effectively. Plastic bag is adjustable in length. It is applicable for packing shirts, raincoats, pants, suits and wall fashion. It is an indispensable equipments for laundry, garment enterprise, hotel, dry cleaning shop, etc.



### BP Series Pants Blowing Machine



- > With steam and air workstations.
- > Waistband expansion device, the tension can be adjusted and maintained, regardless of the size of pants.
- > Legs down device, with dual adjustment, for both long and short pants.
- > Breast have a fixed waistband device.
- > Two motor, strong wind and hot air.

Model		BP-6
Motor Power	kW	2
Required Steam pressure	kg/cm <sup>2</sup>	4.5
Steam consumption	L/h	50
Dimension	L(mm)	1300
	W(mm)	800
	H(mm)	2300
Weight	KG	300

