



Primer

C-200/32 P

Flatwork ironers Ø 325



ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.
Digital speed and temperature display.



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable).
Fumes circulation circuit from the bottom reducing energy consumption.



ROBUSTNESS

Roll driving by inverter: smooth operation preventing the wear of belts and mechanical elements.
Nomex quality feeding and ironing belts: high temperatures resistant.
Skinplate and stainless steel panels: long lasting.
Coiled felt for greater lifespan.



ERGONOMICS

Acoustic comfort : <63 dB.
Appropriate operating height: 990 mm.
Minimal encumbrance: space saving, suitable for most spaces.
Electronic control with Auto mode: easy to use, optimized ironing speed.



EASY MAINTENANCE

Easy access to all components on both sides of the machine.
A single electrical connection and fume outlet.




OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.
Front feeding and return.
Built-in Cool Down system.
Polished steel roll Ø 325 mm.
Roll length:

- 1400 mm (C-140/32 P)
- 1600 mm (C-160/32 P)
- 2000 mm (C-200/32 P)

Electric or atmospheric gas heating.
CE standard.

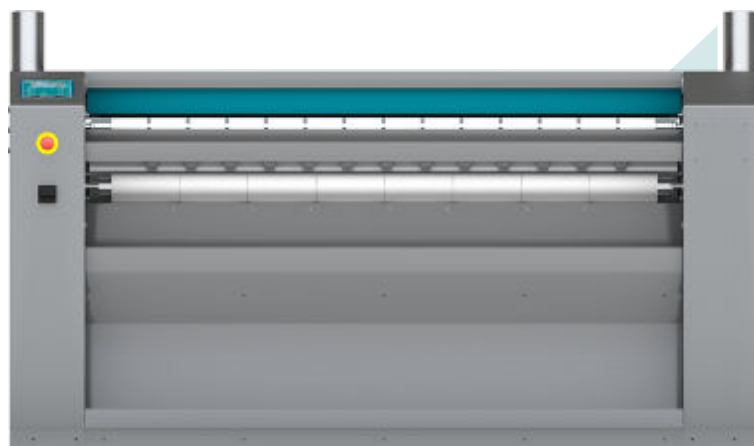

OPTIONS


- SMART IRON: humidity control
- Nickel Plated roll C-200/32
- Maritime wooden packing for C-200/32
- 230 V I N 50 Hz gas C-200/32
- 230 V I N 60 Hz gas C-200/32
- 230 V III 50-60 Hz electric C-200/32
- 440 V III 50-60 Hz electric C-200/32 (maritime)

GENERAL DETAILS	UNIT.	C-200/32 P	
Theoretical production Electric heating*	Kg/h	40	
	lb/h	88	
Theoretical production Gas atmo heating*	Kg/h	42	
	lb/h	93	
Theoretical production Radiant gas heating*	Kg/h	N/A	
	lb/l	N/A	
Roll Ø	mm	325	
	inch	12,80	
Working width	mm	2.000	
	inch	78,7	
Height floor-feeding belts	mm	990	
	inch	39,0	
Working speed	m/min	1,5-10	
	ft/min	4.9-32	
Electronic control	-	YES	
No. Programs	-	2	
Length folder	-	NO	
Large surface contact with linen	-	270°	
POWER			
Electric mod.: heating power	Kw	21	
Electric mod: Total electric power	Kw	21,49	
Gas mod.: heating power	Kw	30	
Gas mod.: total electric power	Kw	0,49	
Steam mod. : heating power	Kg/h	-	
Roll motor power	Kw	0,28	
Fan motor power	Kw	0,12 x 2	
CONNECTIONS		E	G
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 6A
	nº x AWG/A	N/A	3 x 13 / 6A
Tension 230V - III + T	Nº x mm² / A	4 x 10 / 63A	4 x 2,5 / 6A
	nº x AWG/A	4 x 7 / 63A	3 x 13 / 6A
Tension 400V - III + N + T	Nº x mm² / A	5 x 6 / 40A	5 x 2,5 / 6A
	nº x AWG/A	5 x 9 / 40A	5 x 13 / 6A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	-	
Ø Condensed (Steam models)	BSP	-	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	2.552 / 2.780	
	inch	100,5 / 109,4	
Net depth / gross depth	mm	686 / 770	
	inch	27 / 30,3	
Net height / gross height	mm	1.112 / 1.400	
	inch	43,8 / 55,1	
Net weight / gross weight	kg	435 / 458	
	lbs	959 / 1.010	
Net volume / Gross volume	m³	1,95 / 3,00	
	f³	68,75 / 105,83	
OTHERS			
No. Fume outlet	Nº	2	
Ø Fume outlet	mm	98	
	inch	3,86	
Air Flow	m³/h	1.000	
	cfm	589	
Sound level	dB	63	
Capacité d'évaporation (max)	l/h	18	
	USgallon/h	4,8	
Additional ELECTRIC POWER for folder option	-	-	



Additional ELECTRIC POWER for folder + rear exit option	-	-
---	---	---

* 45% moisture

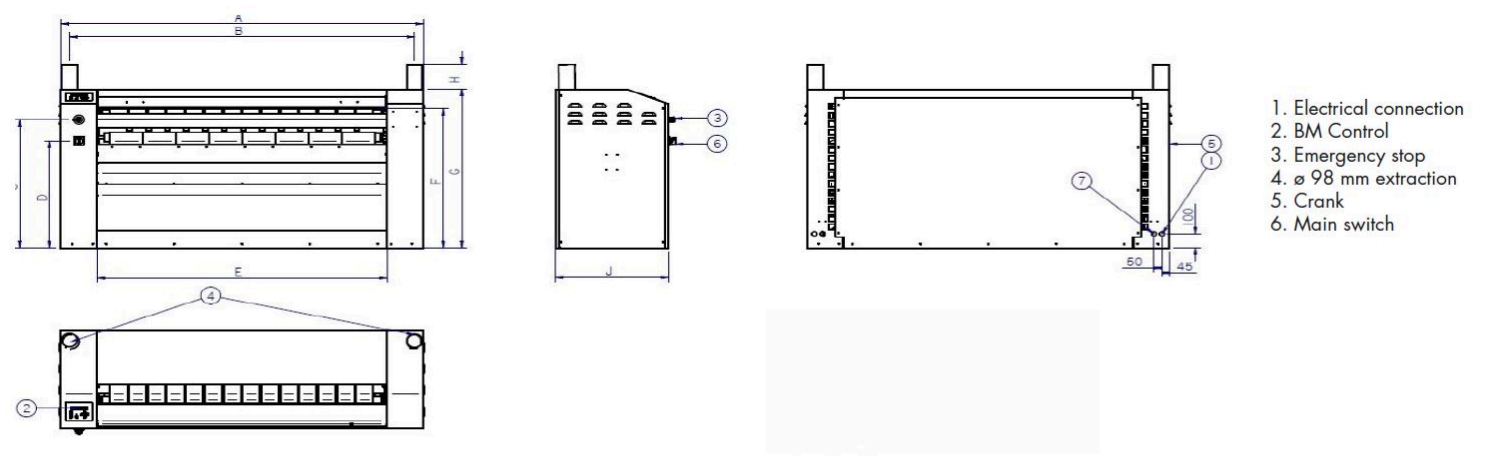

	A	B	C	D	E	F	G	H	I	J
C-140/32 P	1.952	1.846	900	750	1.510	980	1.112	140	746	686
C-160-32 P	2.202	2.096	900	750	1.760	980	1.112	140	746	686
C-200/32 P	2.552	2.446	900	750	2.110	980	1.112	140	746	686