



Primer

CL-200/65 T2

Flatwork ironers Ø 650 EXCELLENCE



T2 CONTROL

PRIMERLINK - IoT connectivity as standard.

7" touch screen fully programmable.
37 available languages, 5 preset programs.
USB connection. Free software online for programming, telemetry, data analysis.
Reversing roll as standard.



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable parameter).
Fumes circulation circuit from the bottom reducing energy consumption.

Model with gas radiant burners: +25% productive.

SMART IRON: automatic regulation of ironing speed according to residual moisture (standard).

High production system: ironing speed up to 15 m/min (standard).



ROBUSTNESS

Roll driving by speed inverter: smooth operation preventing the wear of belts and mechanical elements.
Panels in skinplate and stainless steel.
Nomex quality ironing belts: high temperatures resistant.
Nickel plate roll as option: Nickel-plated cylinder, anticorrosive, more durable.



ERGONOMICS

Acoustic comfort : <65 dB.
Appropriate operating height: 1120 mm feeding belts.
Compact dimensions.



EASY MAINTENANCE

Easy access to all components on both sides of the machine.
Complete technical menu: statistics, autotest, data recovery for technician and maintenance.
Remote communication: faster intervention.



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.
Front feeding and return.
Built-in cool down system.
Polished steel roll Ø 650 mm.
Roll length:
• 2000 mm (C-200/65)
• 2600mm (C-260/65)
• 3300mm (C-330/65)
Electric, radiant gas or steam heating.
CE standard.



OPTIONS

- No drop tray CL-200/65
- Rear exit without folder CL-200/65
- Nickel plated roll CL-200/65 E/G
- Gas LPG option (Propan) for radiant gas model
- Gas NG option (Natural Gas) for radiant gas model
- Built-in lengthwise folder CL-200/65 (front exit)
- Built-in lengthfolder + rear and front exit CL-200/65
- Maritime wooden packing for CL-200/65
- Cross folder Ø 500-650 2000
- Antistatic belts for CL-200/65 ironers without folder
- 230 V III 50-60 Hz CL-200/65 E
- Antistatic belts + bar for CL-200/65 ironers with folder
- 230 V III 60 Hz CL-200/65 G
- 440 V III 50-60 Hz CL-200/65 E
- 120 V I N 60 Hz Gas CL-200/650 (Gas US)

GENERAL DETAILS	UNIT.	CL-200/65 T2	
Theoretical output Electric heating* standard mod. front or rear exit	Kg/h	90	
	lb/h	198	
Theoretical output Electric heating* mod. Folder front exit	Kg/h	63	
	lb/h	139	
Theoretical output Electric heating* mod. Folder front and rear exit	Kg/h	59	
	lb/h	129	
Theoretical production Gas atmo heating*	Kg/h	N/A	
	lb/h	N/A	
Theoretical production Radiant gas heating* mod standard front or rear exit	Kg/h	104	
	lb/l	229	
Theoretical production Radiant gas heating* mod folder front exit	Kg/h	73	
	lb/l	160	
Theoretical production Radiant gas heating* mod folder front and rear exit	Kg/h	68	
	lb/l	149	
Roll Ø	mm	650	
	inch	25,59	
Working width	mm	2.000	
	inch	78,74	
Height floor-feeding belts	mm	1.170	
	inch	46,06	
Working speed standard mod.	m/min	0,5 - 15	
	ft/min	1,6 - 49	
Working speed mod. with folder	m/min	2 - 10	
	ft/min	6,5 - 32	
Electronic control	-	ET2	
No. Programs	-	5	
Lenght folder	-	OPT.	
Rear exit	-	OPT.	
Large surface contact with linen	-	305°	
POWER			
Roll motor power	Kw	0,55	
Fan motor power	Kw	0,25 x 2	
Electric mod.: heating power	Kw	42	
Electric mod: Total electric power	Kw	43,05	
Gas mod.: heating power	Kw	52	
Gas mod.: total electric power	Kw	1,05	
Steam mod.: heating power	Kw	60	
Steam mod.: total electric power	Kw	1,05	
Steam consumption	Kg/h	60	
Additional electric power standard mod. Rear exit	Kw	0,13	
Additional electric power mod with folder front exit	Kw	0,23	
Additional electric power mod with folder rear exit	Kw	0,1	
Additional electric power mod with folder front and rear exit	Kw	0,33	
CONNECTIONS		E	G/S
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 10A
	nº x AWG/A	N/A	3 x 13 / 10A
Tension 230V - III + T	Nº x mm² / A	4 x 25 / 125A	4 x 2,5 / 10A
	nº x AWG/A	4 x 3 / 125A	4 x 13 / 10A
Tension 400V - III + N + T	Nº x mm² / A	5 x 16 / 80A	5 x 2,5 / 10A
	nº x AWG/A	5 x 5 / 80A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	3110 / 3290	
	inch	122,4 / 129,5	







Net depth (with rear exit open) / gross depth	mm	1175 (1480) / 1360
	inch	46,3 (58,2) / 53,5
Net height / gross height	mm	1780 / 1940
	inch	70,1 / 76,4
Net weight / gross weight standard mod.	kg	1389 / 1449
	lbs	3062 / 3194
Net weight / gross weight standard mod. with rear exit	kg	1419 / 1479
	lbs	3128 / 3261
Net weight / gross weight mod. Folder front exit	kg	1449 / 1509
	lbs	3194 / 3327
Net weight / gross weight mod. Folder front and rear exit	kg	1499 / 1559
	lbs	3305 / 3437
Net volume (with rear exit) / Gross volume	m ³	6,50 (7,99) / 8,68
	f ³	230 (282) / 307

OTHERS


No. Fume outlet	Nº	2
Ø Fume outlet	mm	153
	inch	6,0
Air Flow	m ³ /h	1.200
	cfm	706
Sound level	dB	65
Evaporation power standard mod.	l/h	47
	USgallon/h	12,4
Evaporation power mod. Folder front exit	l/h	33
	USgallon/h	8,7
Evaporation power mod. Folder front and rear exit	l/h	30
	USgallon/h	8

* Theoretical production 45% moisture

** With open rear exit

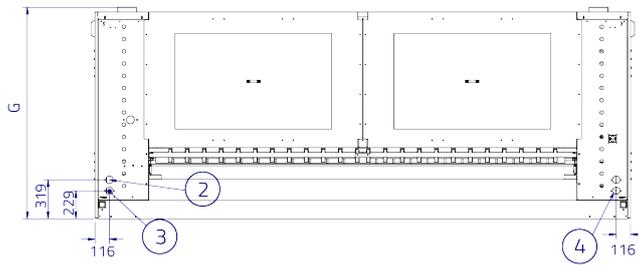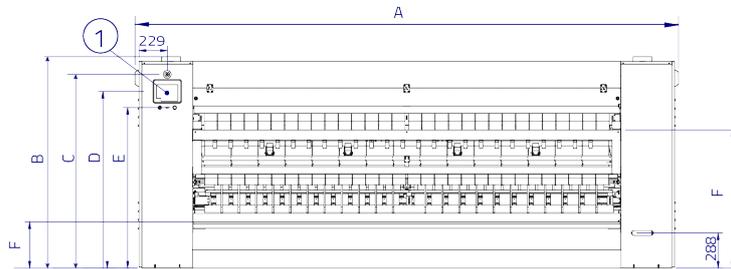

1. T2 control panel.
2. Steam outlet ø1/2" male.
3. Gas inlet ø22 or steam inlet ø3/4" male.
4. Electric inlet.
5. Steam exhaust ø152.
6. Isolator switch.

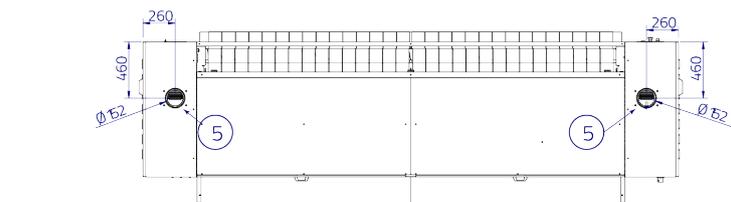

	A	B	C	D	E	F	G	H	I	J
CL-2065 / CL-2050	3110	1729	1584	1445	1313	1130	1729	1428	1553	1101
CL-2665 / CL-2650	3710	1729	1584	1445	1313	1130	1729	1428	1553	1101
CL-3365 / CL-3350	4410	1729	1584	1445	1313	1130	1729	1428	1553	1101

