



# Primer

## LS-120C T2

### High spin washers

#### T2 CONTROL

User friendly and totally programmable 7" USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT Videos on display (ads, instructions, etc.)  
37 languages  
8 dosing signals as standard

#### G FACTOR

High G-Factor: G-FACTOR 500 (11 - 18 kg), for 450 (22 - 80 kg) and 350 (100 - 120kg).  
It reduces the residual moisture.

#### CONNECTIVITY

**PRIMERLINK** - Standard and free IoT connectivity. Remote technical service.  
Management for laundries: OPL and COIN.  
Remote payment: **App PRIMER LAUNDRY** (mod. LS-11 up to LS-45C).

#### EFFICIENCY

Optimal KG.  
Intelligent consumption: automatic adjustment of water and soap consumptions (standard).  
Water Recovery tanks ready: **SAVETANK & SAVETANK XL**.  
Low water consumption.

#### VERSATILITY

Make to order: customisation.  
OPL < > COIN (mod. LS-11 up to LS-45C).  
Electric < > Hot water.  
Drain valve < > Pump (LS-11-14).  
Wet Cleaning.

#### ERGONOMICS

Easy opening/closing system for door lock.  
Biggest door diameters:  
• Ø 373 (11, 14 kg)  
• Ø 460 (18, 22, 28 kg)  
• Ø 560 (35, 45, 60, 80 kg)  
• Ø 700 (100, 120 kg)

#### EASY MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians.

#### OTHERS

Grey skinplate outer casing.  
Drum and tub in stainless steel AISI 304.  
Detergent dispenser with 4 compartments.  
Electronic control of imbalance with frequency control.  
LOADING AID feature: water and rotation control.  
CB and WRAS approved product. Option ETL.  
REG4 standard certified by KIWA.




#### OPTIONS

- License IoT - Primer Link
- Steam kit LS-100C/120C
- DQ-2 Dosing pump kit. 2 pumps with guide support.
- Extra detergent dosage DB-1
- Double drain kit LS-100C/120C
- Ready for SAVETANK XL conn. 1" for washers LS/RS-100C/120C
- Double tilt LS-100C/120C. Compatible with the weighing system.
- Front tilt LS-100C/120C. Compatible with the weighing system.
- Weighing system LS-60C/ 80C/ 100C / 120C. Incl. kit 6 extra dosing signals
- 6 extra dosing signals card LS-60C/80C/100C/120C
- Reversible door: reverse door opening
- Double heating E + S LS-60/80
- Stainless steel outer casing LS-120C
- Kit watermark Australia
- 440 V III No N 50/60 Hz LS-100C/120C (maritime)
- 230 V III 50/60 Hz for LS-100C/120C

DRUM	UNIT.	LS-120C T2
Capacity 1/9	Kg	130
Capacity 1/10	Kg	115
Volume	l	1.150
Diameter	mm	1.360
Depth	mm	775
GENERAL DETAILS		
Washing speed / Spining speed	r.p.m.	34 / 678
G Factor	-	350
Maximum force transmitted	KN	37,77 ±5,25
Frequency-dynamic force	Hz	11,33
Noise level	dB	< 70
Coin laundry version	-	NO
Double drain	-	OPT.
Weighing system	-	OPT.
Tilting door	-	OPT.
DOOR		
Height center door / Height door	mm	1.330 / 900
Diameter	mm	700
POWER		
Motor	kW	15
Electric heating power	kW	-
Total electric power (electric model)	kW	-
Total electric power (hw, steam model)	kW	15
CONNECTIONS		HW/S
Tension 110V - I + N + T	Nº x mm² / A	-
Tension 230V - I + N + T	Nº x mm² / A	-
Tension 230V - III + T	Nº x mm² / A	3x16+T - 63A
Tension 400V - III + N + T	Nº x mm² / A	4x6+T - 40A
Steam inlet (Steam model)	inch	1-1/4"
Maximum steam consumption (Steam model)	Kg/h	26,5
Water inlet	inch	1-1/2"
Water main pressuer	Kg/cm²	2-4
Maximum water consumption*	l / h	1.254*
Drain	mm/inch	4"
Drainage capacity	Lit/min	500
DIMENSIONS / PACKING DIMENSIONS		
Net Width/Gross width	mm	1.836 / 1.940
Net Depth/Gross depth	mm	1.832 / 2.030
Net Height / Gross height	mm	2.245 / 2.290
Net weight / Gross weight	kg	2.762 / 3.058
Volume	m³	9

\* Program number 20: LS-11 to LS-80C at 75% load / LS-100C and 120C at 100% load.



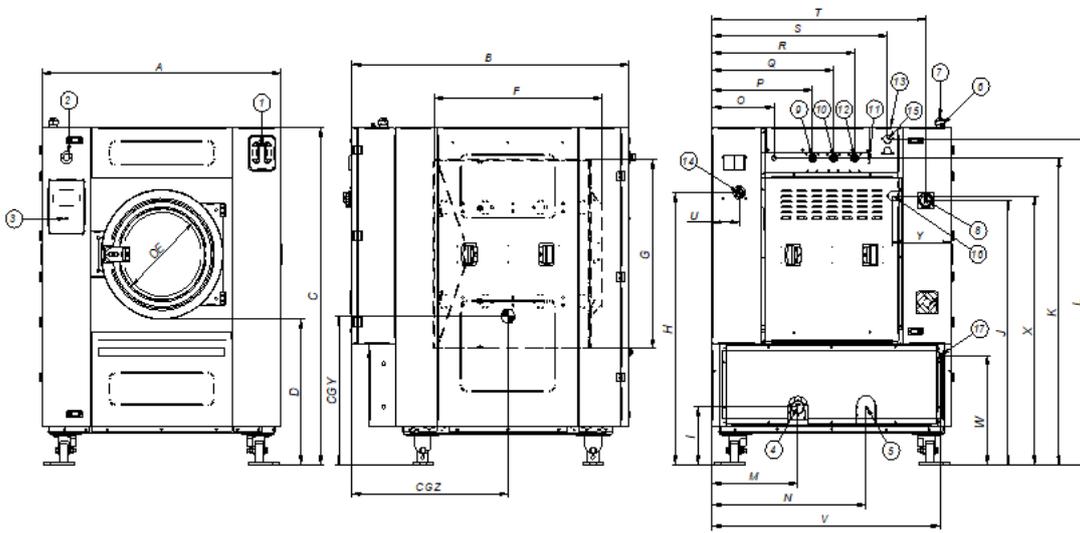

1. Soap dispenser
2. Emergency stop
3. USB port
4. Drain 1
5. Drain 2
6. Electric connection to liquid soap pumps
7. Electrical connection
8. Main switch
9. Auxiliar water inlet
10. Hot water inlet
11. Equipotential connection
12. Cold water inlet
13. Steam output
14. Liquid soap connection
15. Steam connection
16. Air intake
17. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LS-120C	mm	1.836	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	1.095	1.092	494	634	774	954	994	1.239	1.646	165	2.049	2.050	717	853	1.130
	inch	72,28	72,13	88,39	37,20	27,56	36,61	53,15	68,50	13,23	70,12	80,24	83,07	43,11	42,99	19,45	24,96	30,47	37,56	39,13	48,78	64,80	6,50	80,67	80,71	28,23	33,58	44,49